

GOAL

To improve the capacity of the City's sewage system.

HOW

By replacing 48-in and 54-in diameter sanitary sewer pipes with 4,500 ft of 84-in diameter pipes and approximately 300 ft of 72-in diameter pipes.

WHERE

Along North Fourth Street between US 101 and East Hedding Street and along Commercial Street between Fourth Street and Fifth Street, fronting residences and businesses.

WHEN

Construction began in August 2019 and is anticipated to continue through Summer 2021.

HIGHLIGHTS

The project will cross under Highway 101, Interstate Highway 880, several large storm pipes and existing utilities, and require Caltrans' permits to perform work within Caltrans' right of way.

PROJECT DETAILS

Infrastructure changes will convey sewage from Commercial Street to Old Bayshore Road north of Highway 101 and the installation of a small diameter local collector sanitary sewer system. Existing junction structures will need to be modified and new ones built in order to accommodate the new pipes. Sewage rerouting and diversion will be required throughout construction to maintain service.

KEYS TO PROJECT SUCCESS

- **Thorough community outreach**
- **Complex traffic management**


FUTURE IMPACTS

- **Shutdown of ¼ City interceptors for maintenance/repair**
- **Traffic will be temporary impacted during construction along North Fourth Street**

FOURTH ST SEWER PROJECT

FACT SHEET

Fall 2020

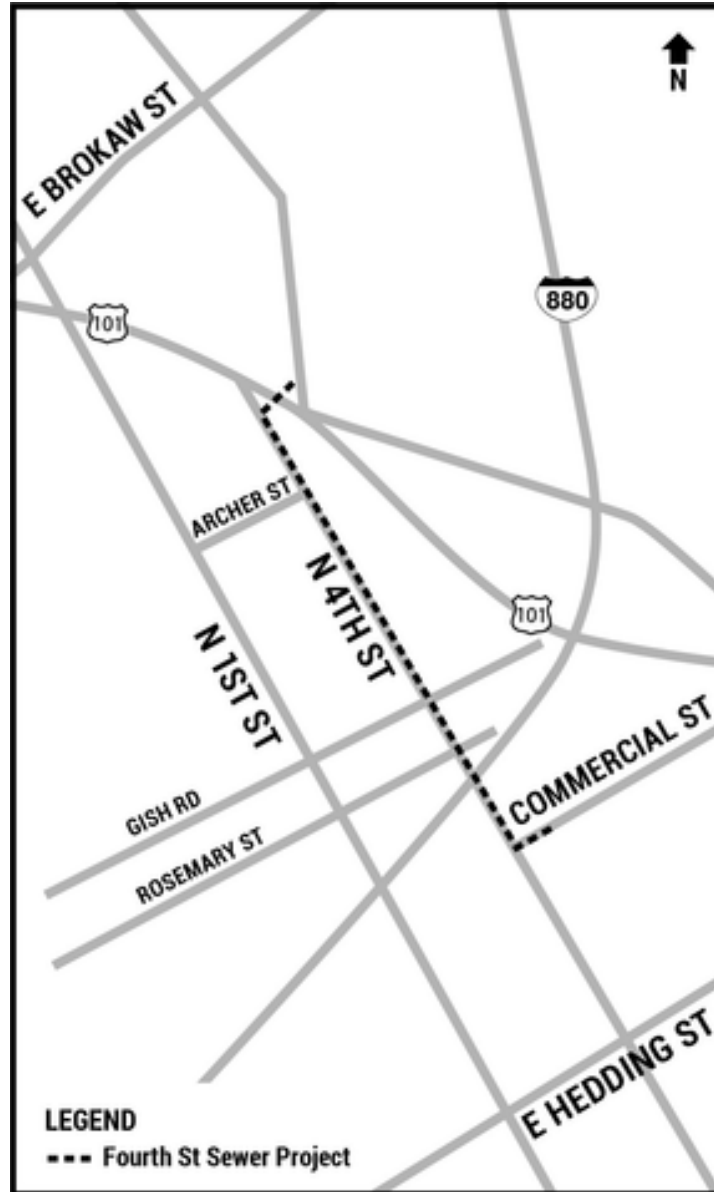

PROJECT MAP