

# FOURTH ST SEWER PROJECT

FACT SHEET | FEBRUARY 2021

## GOAL

To improve the capacity of the City's sewage system.

## HOW

By replacing 48-in and 54-in diameter sanitary sewer pipes with 4,500 ft of 84-in diameter pipes and approximately 300 ft of 72-in diameter pipes.


## WHERE

Along N Fourth St between US Highway 101 (US 101) and E Hedding St and along Commercial St between Fourth St and Fifth St, fronting residences and businesses.

## WHEN

Construction began in August 2019 and is anticipated to continue through Fall 2021.

| MILESTONES                     |                         |
|--------------------------------|-------------------------|
| <b>Construction Begins</b>     | <b>Summer 2019</b>      |
| Tunneling Work (Under US 101)  | Complete                |
| Fourth St Pipe Replacement     | Fall 2020 - Summer 2021 |
| Pipe Laying Work (Under I-880) | Fall 2020 - Spring 2021 |
| Commercial St Pipe Replacement | Winter 2021 - Fall 2021 |
| Repaving                       | Spring 2021 - Fall 2021 |
| <b>Project Completion</b>      | <b>Fall 2021</b>        |

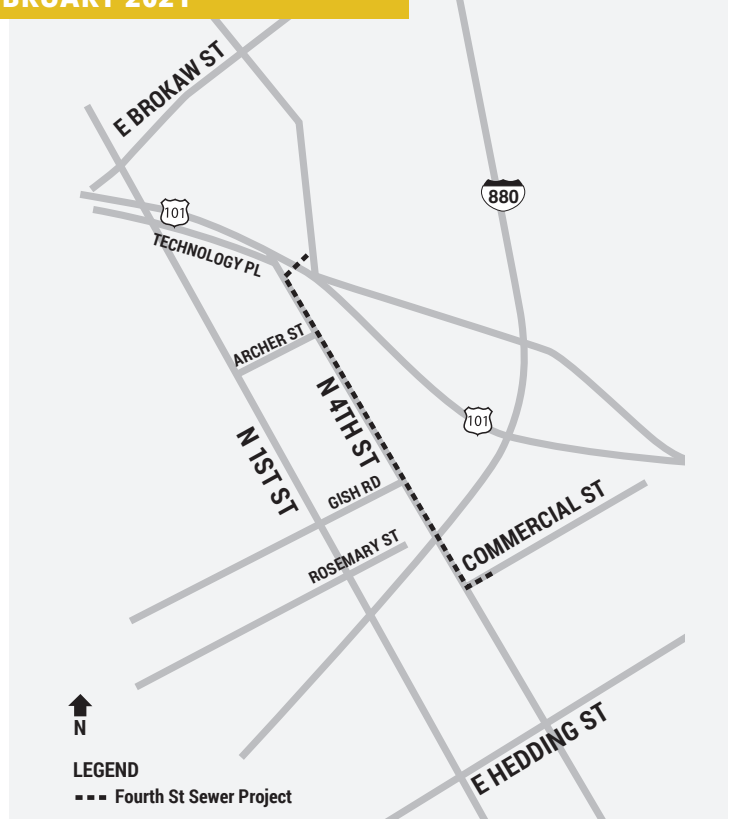

### KEYS TO PROJECT SUCCESS

- Thorough community outreach
- Complex traffic management

### FUTURE IMPACTS

- Shutdown of ¼ City interceptors for maintenance/repair
- Traffic will be temporarily impacted during construction along N Fourth St

## PROJECT DETAILS

Infrastructure changes will convey sewage from Commercial St to Old Bayshore Rd north of US 101 and the installation of a small diameter local collector sanitary sewer system. Existing junction structures will need to be modified and new ones built in order to accommodate the new pipes. Sewage rerouting and diversion will be required throughout construction to maintain service.

## HIGHLIGHTS

The project will cross under US 101, Interstate 880, several large storm pipes and existing utilities, and require Caltrans permits to perform work within Caltrans right of way.