



FOURTH ST SEWER PROJECT

FACT SHEET

GOAL

To improve the capacity of the City's sewage system

HOW

By replacing 48-inch and 54-inch diameter sanitary sewer pipes with 4,500 feet of 84-inch diameter pipes and approximately 300 feet of 72-inch diameter pipes.

WHERE

Along North 4th Street between US 101 and East Hedding Street and along Commercial Street between 4th Street and 5th Street, fronting residences and businesses.

WHEN

Construction began in August 2019 and is anticipated to continue through Winter 2021.

HIGHLIGHTS

The project will cross under US 101, I-880, several large storm pipes and existing utilities, and require Caltrans' permits to perform work within Caltrans' right of way.

NITTY GRITTY

Infrastructure changes will convey sewage from Commercial Street to Old Bayshore Road north of US 101 and the installation of a small diameter local collector sanitary sewer system. Existing junction structures will need to be modified and new ones built in order to accommodate the new pipes. Sewage rerouting and diversion will be required throughout construction to maintain service.

KEYS TO PROJECT SUCCESS


- Thorough community outreach
- Complex traffic management

FUTURE IMPACTS

- Shutdown of 1/4 City interceptors for maintenance/ repair
- Traffic will be temporarily impacted during construction along North 4th Street.

FOURTH ST SEWER PROJECT

FACT SHEET

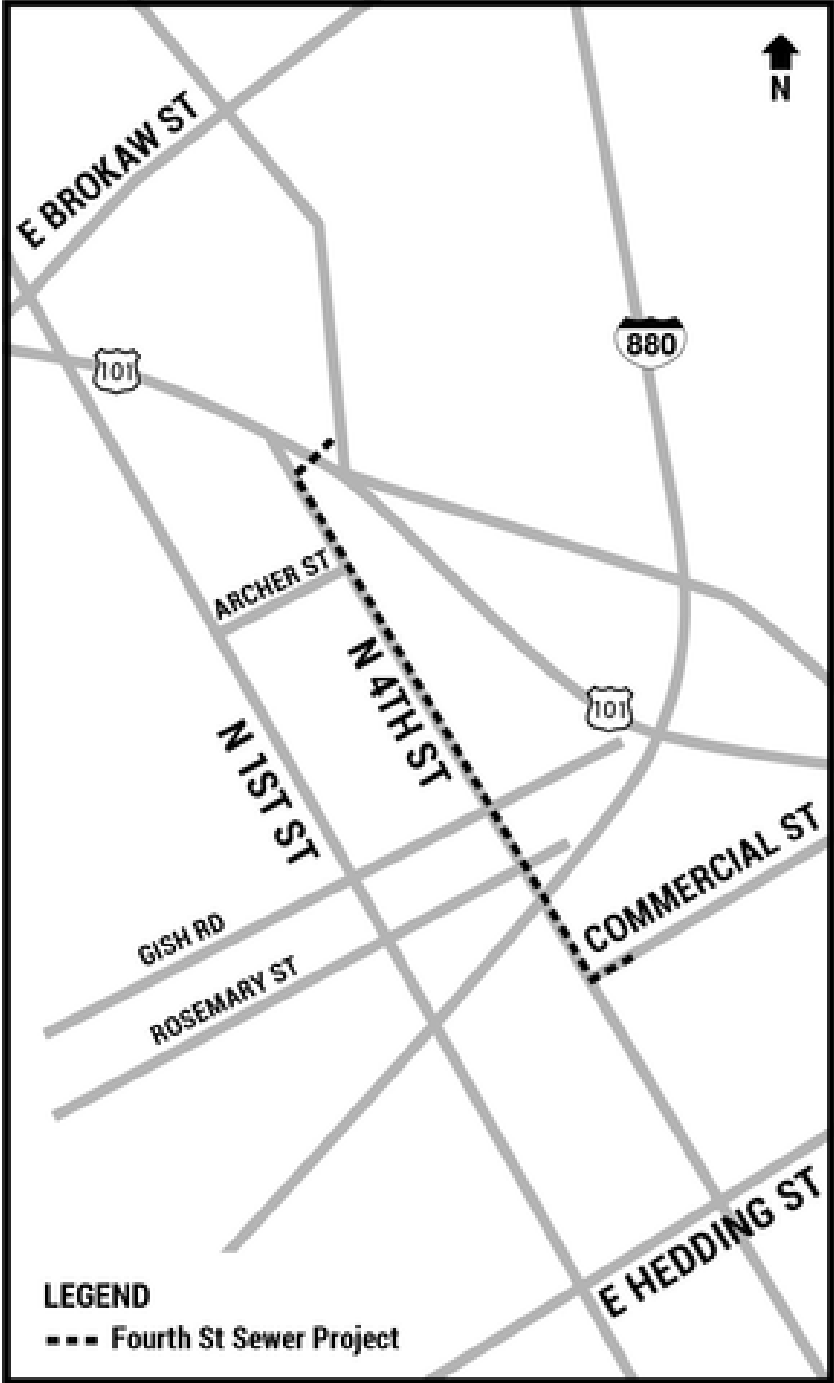

PROJECT MAP